


PSRD-14R

Two channels receiver at 12-24VAC/DC

Product code	Frequen cy (MHz)	Codification	Channels	Relays	VAC/DC	Memory
PSRD-14R	433,92	Open rolling	2	Push ON	12-24	300

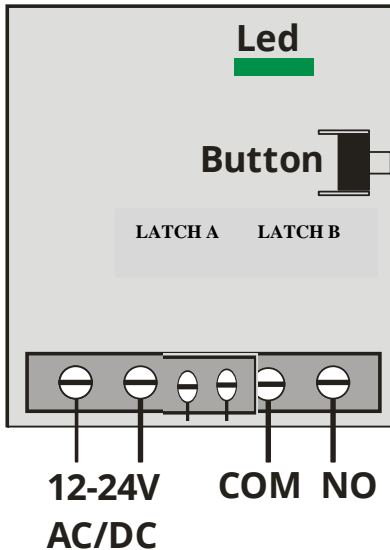

Functions

Power 12-24 AC/VDC:

In first 2 terminal, connect the power 12-24 AC/DC. When the receiver powers, the indication LED light flashes green color.

Relays output:

The relay output COM - NO is activated as long as the receiver accepts continuous command from the saving transmitter. The first 2 terminals are for the first channel and the other 2 for the second channel.

Functions:

Latch and non- Latch: Latch A is for channel 1, B is for channel 2. It is non-latch when no short circuit cap on LATCH. It is LATCH when there is short circuit cap on LATCH.

Delete the memory:

Press the learning button S1 for a long time, the indicating LED is red for 8 seconds. Then turns into green, release the learning button, LED is red for 2 seconds and then turns into green. It is indicated the deleting is successful.

Learning transmitters in the memory:

Press the learning button of the receiver and the indication LED light is red. Press any one of the transmitter twice times, LED flickers and continues on several seconds, then turns into green. It is indicated the learning is successful. 300 rolling codification transmitters can be stored in the memory of the receiver.

